



GETTING STARTED WITH SMART PLUG

INDEX

Section 1: Mounting your Smart Plug

Instructions.....	03
Dimensions.....	03

Section 2: Connecting to Smartee

Adding Smart Plug to Zigbee Network.....	04
Removing Smart Plug from Zigbee Network.....	04

Section 3: Specs

Electrical Specifications.....	05
RF characteristics.....	05

Section 4: Security Instructions

Security Guidelines.....	06
--------------------------	----


1 MOUNTING YOUR SMART PLUG

Instructions

1- Attach the plug from the appliance to be controlled into the receptacle of the Smart Plug.

2- Attach the Smart Plug to wall receptacle. Verify that the receptacle is powered. If the receptacle is powered by a wall switch, the wall switch must be kept ON at all times for the module to operate properly.

Dimensions

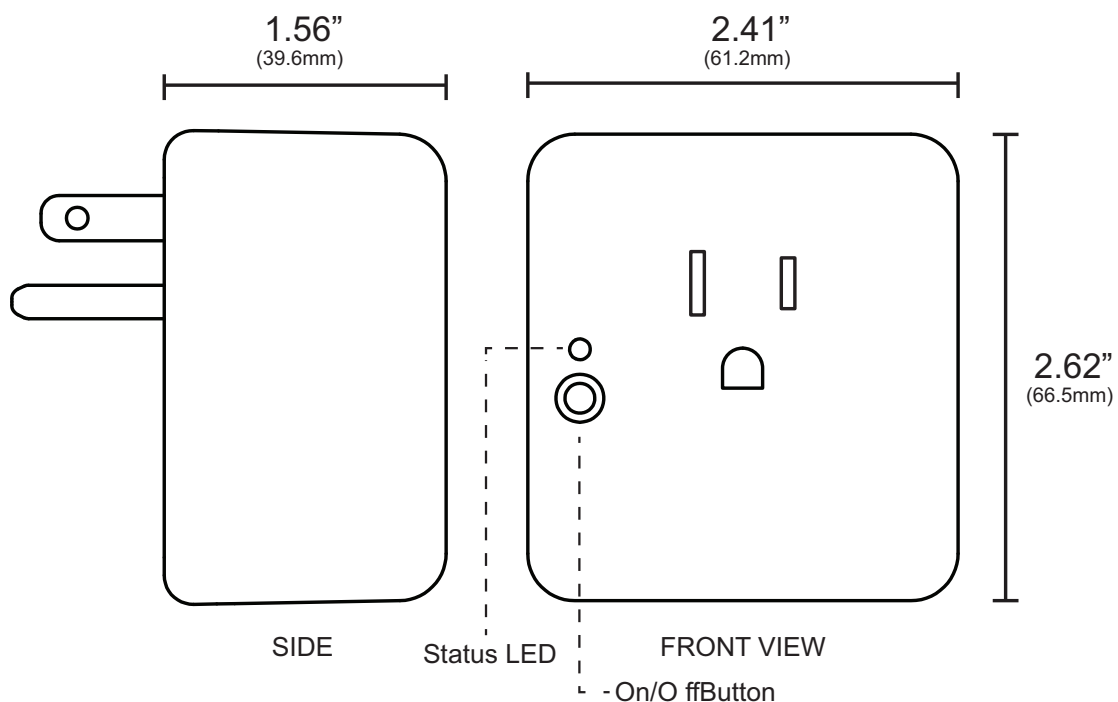

2 CONNECTING TO SMARTEE

Adding to Zigbee Network

To add the Smart Plug to Smartee, click on the “Add Device” function of your Weber App. Plug the Smart Plug into a receptacle and it will immediately begin searching for a network to join.

If the Smart Plug does not automatically join the network, unplug any devices from the module and unplug from the wall. Now hold the on/off button while plugging it back into the wall. Hold the button until the status LED turns on.

Upon a successful joining of the Smart Plug to the ZigBee network of your Smartee, the status LED will become static.

If after following these steps the Smart Plug will not join the Smartee Zigbee network, do as follows:

- Make sure the Smart Plug is powered up.
- Ensure it is within RF range of a Smartee (30-90ft indoor)

Once the Smart Plug is added to your Smartee, you will be able to start controlling it through your Weber App.

Removing from Zigbee Network

If it becomes necessary to remove the Smart Plug from a Zigbee network then you must factory default it. To do it:

- A. Remove the Smart Plug from the wall receptacle.
- B. Press and hold on/off button. While plugging it back into the wall. Hold the button until the status LED turns on.
- C. After 2 seconds the status LED will turn ON.
- D. Once the LED is ON let go of the button.
- E. The Smart Plug will now be reset to factory defaults and begin scanning for a ZigBee network to join.

3 SMART PLUG SPECS

Electrical specifications

Description	Min	Typ	Max	Unit
Rated	-	-	120	VAC
Input frequency	-	-	60	Hz
Operating temperature	0°	-	40°	°C
Storage temperature	-20°	-	50°	°C
Operating Humidity	0	-	90%	RH (non-condensing)
Output			12A General Purpose	

Wireless RF Characteristics

Description	Min	Typ	Max	Unit
RF Channels	-	-	16	-
TX Strength	-	-	+20	dBm
Range	-	-	50+	ft.
Protocol		Zigbee HA 1.2		

4 SAFETY INSTRUCTIONS



Safety Guidelines

- To be installed and/or used in accordance with appropriate electrical codes and regulations.
- If you are unsure about any of these instructions, consult a qualified electrician.
- Unplug unit when servicing connected appliances.
- Follow all guidelines carefully, if you have any questions contact us at support@webeelife.com.



Warning: Each module outlet is rated to 12A only if the connecting cord is rated at 90C or greater.

Warning: If a load greater than 12 amps is attached to the output, the Smart Plug will be damaged and will no longer function.

Warning: The total current of the device is 12A. Do not exceed this value!

Warning: If a direct short is created on the output, the Smart Plug will be damaged and will no longer function.

V1.0 REV. January, 2015

webee®

